

Reconstructing complex networks from time series

Zoran Levnajić

Faculty of Information Studies, Novo mesto, Slovenia

Abstract.

Novel method of reconstructing the topology of dynamical networks from time series is proposed. By examining the variable-derivative correlation of the network node pairs, we derive a simple equation yielding the network adjacency matrix. Our key assumption is that the intra-network interaction functions are known. We illustrate the method on a simple example, and discuss the dependence of the reconstruction on the dynamical properties of time series. Our method is applicable to any weighted or directed network, in principle allowing for precision to be estimated.

1 Introduction

Complex systems are ubiquitous in nature. On all scales from genes to societies, various real systems are composed of many units which collectively perform complicated tasks [1]. In the recent years, the framework of complex networks became recognized as an excellent formalism for studying complex systems. By modeling units as nodes and their interactions as links [2], graph analysis methods entered physics, biology, engineering and even sociology [3]. This allowed for a variety of real and artificial complex systems to be extensively examined, typically via computational modeling [4]. Crucial aspect of a complex network is its *structure*, i.e. the topology of connections among its nodes. Properties of network structure dictate its global behavior, and are key to understanding the network's functioning and potentials for its control. For phase-repulsive oscillator models, profound intertwinement between network structure and network dynamics was recently shown [5].

Since the structure of many natural networks is only partially known, it is of central interest to develop methods for reconstructing the network topology from the available empirical information. Various experimental techniques in this directions are already in use, specially in the context of gene regulation networks [6]. In addition, a range of mathematical results is available [7]. Recently, the topology of a social network was inferred using mobile phone data [8]. Theoretical reconstruction methods usually rely on examining computational network models, and are generally divided into two classes. *Invasive* methods involve interfering with the network dynamics via controllable perturbation, which allows for structural data to be easily extracted [9]. These methods generally give very good results, specially when the usage of perturbation is not limited in strength and frequency. However, it is often impractical or even impossible to interact with the on-going net-

work dynamics. *Non-invasive* reconstruction methods focus on investigating the observable network outputs, such as time series of the node's dynamics, or similar measurable quantities describing the internal network states [10,11,12,13]. The relevance of the non-invasive approach is increasingly recognized, particularly due its suitability for detecting links in biological networks [12,13]. However, by not needing to interfere with the network dynamics, non-invasive approaches are typically limited to studying equilibrium network behavior, which often contains only a small amount of information on the system. Alternatively, reconstruction methods also rely on other mathematical techniques, such as control theory [14], compressive sensing [15], and even treat non-equilibrium scenarios [16].

In this contribution, we propose a novel non-invasive network reconstruction method. Classical studies usually involve correlations among the dynamic variables, i.e. network nodes [17]. On the other hand, typical models of network dynamics rely on first-order differential equations (in genetic interactions for example, it is known that one protein's concentration determines the increase or decrease of another protein's concentration [18]). Inspired by this, we examine the correlation between the variable of one node, and the derivative of another node. Our central assumption is the precise knowledge of the functional forms of the intra-network interactions. As we show, depending on the quantity of network information contained in the empirical data, our method can give very precise results even for very short time series, thus being suitable for actual experimental situations. Apart from being non-invasive, our method is conceptually very simple and easy to numerically implement. Based on similar hypothesis, Shandilya and Timme recently proposed another reconstruction method [10]. In contrast to their result, our method avoids solving the overdetermined linear system, and in principle allows for the reconstruction error to be estimated.

The paper is organized as follows: after exposing the reconstruction method in next Section, we illustrate its implementation via simple example in Section 3. We present the possible extensions of our method, and discuss its limitations in Section 4.

2 The Reconstruction Method

We consider a complex system composed of N interacting units, which we represent as a network with N nodes, whose links model the node interactions. Each node is assigned a dynamical state defined by the real variable $x_i \equiv x_i(t)$, where $i = 1, \dots, N$. We assume to be in the possession of empirically obtained trajectories $x_i(t_m)$. They describe the network's discrete-time dynamical evolution over a certain time interval. The available data consists of N sequences, each containing L values $x_i(t_1), \dots, x_i(t_L)$. The measurements of x_i are separated by the observation interval $\delta_t = t_{m+1} - t_m$, which defines the resolution of the time series (sampling frequency). Time interval δ_t is uniform and assumed smaller than the characteristic dynamical time scale.

Hansel-Sompolinsky model [19] by putting $f_L = -x$ and $f_C = \tanh x$ in Eq.1. The complete dynamics on network reads:

$$\dot{x}_i = -x_i + \sum_{j=1}^6 A_{ji} \tanh(x_j). \quad (4)$$

For each node we randomly select an initial condition from $[-1, 1]$, and numerically integrate Eq.4 from time $t = 0$ to $t = 3$. During the run, we store 15 values for each x_i , equally spaced in time, starting with $x_i(t_1 = 0)$. Thus obtained time series for all nodes are shown in Fig.2.

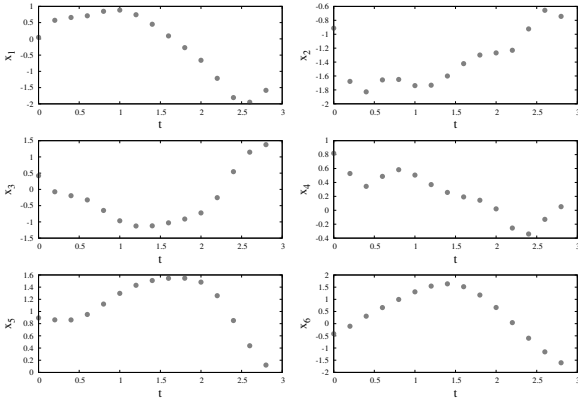


Fig. 2. Time series for all 6 nodes for network Fig.1, obtained for the first set of initial conditions.

We assume now these time series to be obtained from an “external” source, such as an experimental measurement, and use them to reconstruct the network’s adjacency matrix as discussed in the previous Section. To this end, we numerically compute the derivatives $\dot{x}_i(\tau_m)$ and the matrices B_{ij} , C_{ij} and E_{ij} , in order to obtain the reconstructed adjacency matrix R_{ij} via Eq.3. The result is shown in Fig.3 – the original A_{ij} in (a), the reconstructed R_{ij} in (b), and link-by-link comparison of A_{ij} and R_{ij} in (c). The reconstructed matrix R_{ij} approximates the original A_{ij} rather well for all values of link weights. The matrix error is $\Delta_A = 0.18$, and the trajectory error is $\Delta_T = 0.038$, indicating a good reconstruction precision.

We now run another simulation of our dynamical system Eq.4 with the same underlying network, but this time starting from a different set of initial conditions. The new time series of equal size and resolution is obtained and shown in Fig.4. We use them to reconstruct our network again, and compare two reconstructions of the same network, obtained via two sets of time series. The new results are shown in Fig.5, and organized in analogy with the Fig.3. The new R_{ij} has the matrix error $\Delta_A = 0.56$ and the trajectory error of $\Delta_T = 0.050$, which is considerably worse than in the previous example. The reconstruction errors are bigger on most of the links, as it can be clearly seen by comparing Fig.3c and Fig.5c.

Despite that both time series are originating from the same dynamical network, two reconstructions are different, one of which is closer to the actual network. This

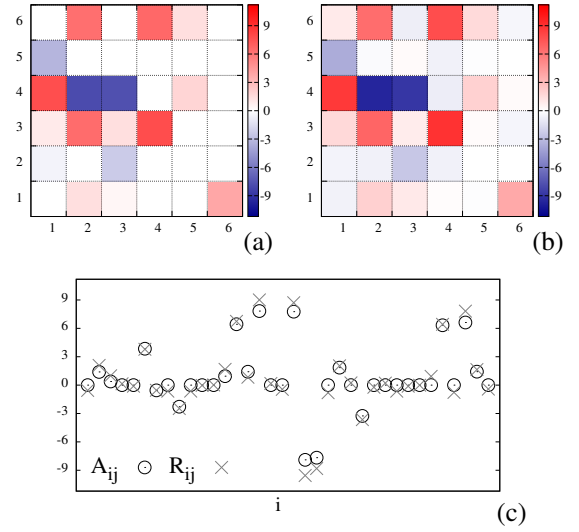


Fig. 3. Original adjacency matrix A_{ij} in (a). The matrix R_{ij} reconstructed from time series in Fig.2 in (b). Colorbar (shade) indicates the link weights. Link-by-link comparison of A_{ij} (circles) and R_{ij} (crosses) in (c). Matrix error $\Delta_A = 0.18$, trajectory error $\Delta_T = 0.038$.

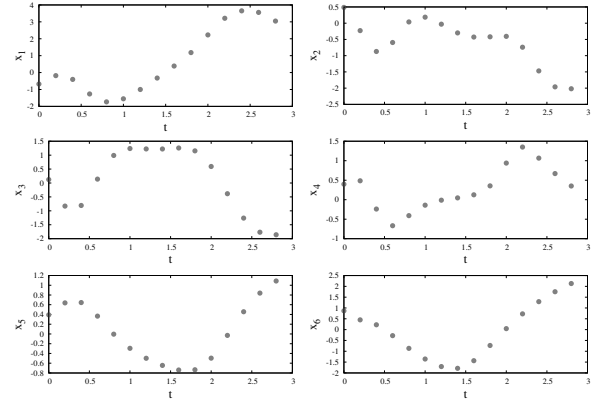


Fig. 4. Time series for all 6 nodes for network Fig.1, obtained for the second set of initial conditions.

shows that besides the length and resolution of the time series, the reconstruction precision crucially depends on the “quality” of the time series as well, i.e. on the quantity of network information contained in them. Time series showing generic patterns (e.g. periodic oscillations) are more easy to reproduce, than the time series displaying more peculiar dynamics (e.g. strong chaos). The former dynamical data contains less extractable network information than the latter data. In the above two cases, the first time series contain more network information than the second, although this cannot be directly seen from Fig.2 and Fig.4, which explains the difference in precision.

On the other hand, it is generally difficult to direct the experimental measurements towards maximizing the available network information. Is there a way to optimize the reconstruction precision for any given time series? The

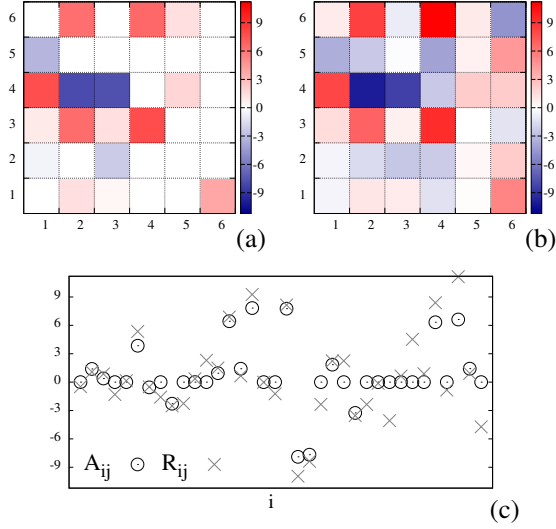


Fig. 5. Original adjacency matrix A_{ij} in (a). The matrix R_{ij} reconstructed from time series in Fig.4 in (b). Colorbar (shade) indicates the link weights. Link-by-link comparison of A_{ij} (circles) and R_{ij} (crosses) in (c). Matrix error $\Delta_A = 0.56$, trajectory error $\Delta_T = 0.050$.

final Section of this paper is devoted to answering this question.

4 Discussion and Conclusions

The proposed reconstruction method applies to any network whose internal interactions are described by Eq.1, and whose interaction functions f_L and f_C are known. However, the final reconstruction precision depends on a number of factors: (i) length and resolution of time series, also related to the precision of derivative estimates; (ii) quantity of network information contained in the empirical data, which can be seen as the reproducibility of time series, or coverage of the dynamical phase space with data; (iii) noise in the systems, which can manifest itself either as an error in the measurement of $x_i(t_m)$ or imprecision in f_L and f_C ; (iv) invertibility of the matrix E_{ij} , which becomes unstable for $\det E_{ij} \approx 0$; and finally, (v) properties of the network itself – some networks are more reconstructable than others, due to exhibiting qualitatively different collective dynamics. In a concrete reconstruction problem, it is difficult to isolate how much each factor contributes to Δ_A . Instead of quantifying this, we propose a generalization of our method, done towards improving and controlling the reconstruction precision, regardless of all named factors.

Our method is based on calculating the correlations between the variable x_i and other terms, as defined in Eq.2. More generally, we can replace x_i by $g(x_i)$, where g is an arbitrary function, without changing the main result.

Eq.2 now becomes:

$$\begin{aligned} B_{ij}^{(g)} &= \langle g(x_i) \dot{x}_j \rangle, \\ C_{ij}^{(g)} &= \langle g(x_i) f_L(x_j) \rangle, \\ E_{ij}^{(g)} &= \langle g(x_i) f_C(x_j) \rangle, \end{aligned} \quad (5)$$

where notation $B_{ij}^{(g)}$ indicates that the matrix B_{ij} was calculated via Eq.5 using a pre-defined function g . Eq.3, which now reads:

$$R_{ij}^{(g)} = (B_{ij}^{(g)} - C_{ij}^{(g)}) \cdot E_{ij}^{(g)-1}, \quad (6)$$

still holds for any choice of function g . As before, in the limit of very long time series, the reconstruction is precisely correct for any choice of g . In realistic scenarios involving (very) short time series, the reconstruction precision, except being finite, will depend on g . Namely, two different g -s will in general yield two different $R_{ij}^{(g)}$ -s, each with its own precision. This means that g plays the role of a tunable parameter, which can be used to find the best reconstruction. Considering various choices of g , one can compute $R_{ij}^{(g)}$ for each one of them, and define as the best that $R_{ij}^{(g)}$ whose reconstructed dynamics shows minimal $\Delta_T^{(g)}$. This way, we can manipulate the reconstruction for any given time series towards finding the optimal g , and hence, the best $R_{ij}^{(g)}$. Such $R_{ij}^{(g)}$ will extract maximal usable network information hidden in the time series, and improve the simple reconstruction obtained for $g(x) = x$. Moreover, the variations of $R_{ij}^{(g)}$ with g are related to the reconstruction precision. For a reliable reconstruction, the obtained $R_{ij}^{(g)}$ will not strongly depend on changes of g . A bad reconstruction will be recognized by a drastic dependence of $R_{ij}^{(g)}$ on g . Note also, that the functional properties of g itself are irrelevant – the *only* role of g is the computation of $R_{ij}^{(g)}$.

To illustrate the implementation of our generalized method, we examine again the second time series shown in Fig.4 (“lower quality” ones). For simplicity, we choose the set of functions $g(x) = x^n$, where for n we take integers between -20 and 20 (except 0). The network is reconstructed using Eq.6 for each such g , and the corresponding $\Delta_A^{(g)}$ and $\Delta_T^{(g)}$ are calculated. The results are shown in Fig.6, where each $R_{ij}^{(g)}$ is represented as a point through its $\Delta_T^{(g)}$ and $\Delta_A^{(g)}$ as coordinates. Clearly, different choices of g lead to very different reconstruction precisions. There is a visible correlation between the two errors, suggesting that smaller $\Delta_T^{(g)}$, on average, leads to a smaller $\Delta_A^{(g)}$. The best reconstruction, in terms of matrix error $\Delta_A^{(g)}$, is found for $g(x) = x^{-6}$ ($\Delta_T^{(g)} = 0.033$, $\Delta_A^{(g)} = 0.10$). However, the reconstruction displaying minimal $\Delta_T^{(g)}$ is obtained for $g(x) = x^{19}$ ($\Delta_T^{(g)} = 0.020$, $\Delta_A^{(g)} = 0.11$). Despite the minimal $\Delta_T^{(g)}$ not coinciding with the minimal $\Delta_A^{(g)}$, their values are still relatively close. Note that, as indicated in Fig.6, both of these results are much better

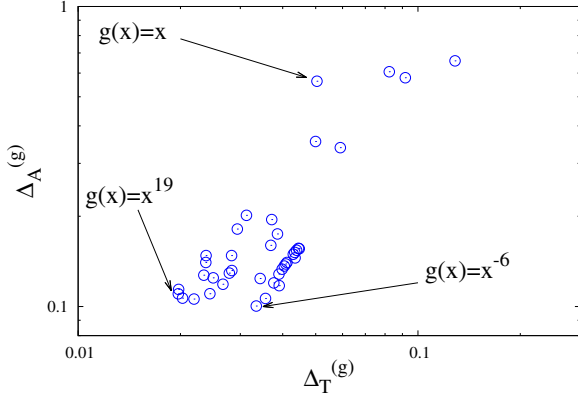


Fig. 6. Reconstructions using many functions g . Each point is specified by $\Delta_T^{(g)}$ and $\Delta_A^{(g)}$ corresponding to $R_{ij}^{(g)}$ obtained via one of $g(x) = x^n$ for n integer between -20 and 20 except 0. Points obtained for $g(x) = x$, $g(x) = x^{19}$ and $g(x) = x^{-6}$ are indicated.

than what initially obtained for $g(x) = x$. In addition, these results are also better than the one found for the first time series from Fig.2 (“better quality” ones). This indicates, that despite lower network information content in the time series from Fig.4, we can considerably improve the reconstruction precision by adequately tuning the function g . We show the reconstruction for $g(x) = x^{19}$ in Fig.7, in analogy with Fig.3 and Fig.5.

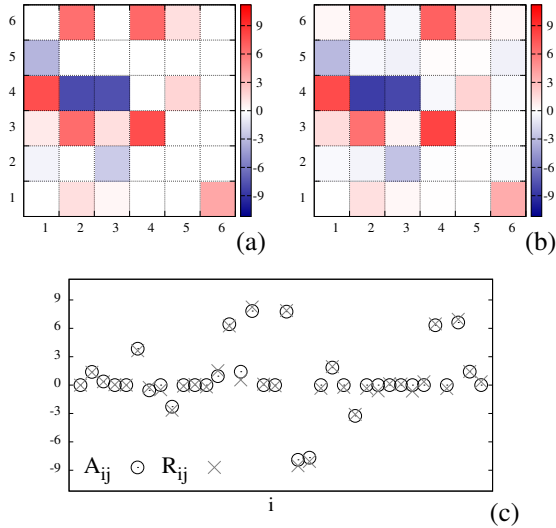


Fig. 7. Original adjacency matrix A_{ij} in (a). The matrix R_{ij} reconstructed from time series in Fig.4 using the function $g(x) = x^{19}$ in (b). Colorbar (shade) indicates the link weights. Link-by-link comparison of A_{ij} (circles) and R_{ij} (crosses) in (c). Matrix error $\Delta_A^{(g)} = 0.11$, trajectory error $\Delta_T^{(g)} = 0.020$.

The role of g is to compensate for errors in the reconstruction, occurring for the reasons discussed at the beginning of this Section. Of course, by considering more (linearly independent) g -s, one can improve the precision in both $\Delta_A^{(g)}$ and $\Delta_T^{(g)}$. However, the question of selecting the optimal g which extracts *all* the network information contained in the time series remains open. Most straightforwardly, one can search for such g via Monte Carlo method, using randomly chosen functions, or through techniques such as evolutionary optimization algorithms [20]. On the other hand, in the actual reconstruction problem we can only measure $\Delta_T^{(g)}$. From Fig.6, this leads to $g(x) = x^{19}$ as our “best guess” for $R_{ij}^{(g)}$. Here, one can seek to estimate $\Delta_A^{(g)}$ by examining the changes of such $R_{ij}^{(g)}$ for small variations around $g(x) = x^{19}$.

A significant limitation of our method is the ubiquity of noise. Simple estimation of derivatives is very sensitive to noise in x_i . However, by using the appropriate data smoothing techniques [21], one might still construct a reasonable approximation. Noise can also be present in form of stochastic time-evolution of our system (additive noise term in Eq.1). Here, if the noise intensity is known, one could modify Eq.6 to include this term as well. Our strongest hypothesis is the precise knowledge of the interaction functions f_L and f_C . Despite the availability of good mathematical models for many natural interactions, lifting this assumption would greatly enhance the generality of our theory. When approximate functional forms are known, interaction functions can be expanded in series, facilitating their reconstruction. This would mean that for each g , we obtain not just $R_{ij}^{(g)}$, but also $f_L^{(g)}$ and $f_C^{(g)}$. This leads to a possibility of obtaining many different networks, all reproducing empirical data equally well, but in combination with different interaction functions.

In conclusion, we presented a novel method of reconstructing the topology of a general dynamical network from the empirical time series. By investigating the variable-derivative correlations, our method reduces to a simple matrix equation, as often studied in linear systems theory [22]. Notably, our method works reasonably well even for very short time series, compared to the system size (we reconstructed 6×6 matrix from 6×15 data points). The problem of network reconstruction is similar to the problem of designing a network with a prescribed dynamics. One can in principle use our method to design a network that displays given time series, by specifying the error $\Delta_T^{(g)}$, which here plays the role of tolerance. Of course, the key difference between network reconstruction and network design, is the interpretation of the solutions. In case of many different networks that satisfying $\Delta_T^{(g)} = 0$, any of them is the solution of the design problem. In reconstruction theory however, one faces the issue of determining which one of them is behind the observed dynamics. We also note that our key assumption is the mathematical form of network interactions given by Eq.1. While a similar theory could be developed for any known form of Eq.1, the problem arises for networks whose interaction form is not (precisely) known, which is often the case in

real (e.g. biological) networks. Finally, the invasive version of our theory would involve time series measured immediately after an external perturbation. Such additional assumption would greatly improve our method, since transient dynamics, similarly to chaotic dynamics, contains far more extractable network information than steady-state dynamics.

5 Acknowledgments

Many thanks to Arkady for suggesting the original idea, in addition to Misha, Šuki, Bernard and Matjaž for constructive feedback.

References

1. A. S. Mikhailov, V. Calenbuhr, *From Cells to Societies: Models of Complex Coherent Action* (Springer, Berlin, 2006).
2. A. Barrat, M. Barthélemy, A. Vespignani, *Dynamical Processes on Complex Networks* (Cambridge University Press, Cambridge, 2008).
3. L. F. Costa *et al.*, Analyzing and modeling real-world phenomena with complex networks: a survey of applications, *Adv. Phys.* **60**(3), 329 (2011).
4. Z. Levnajić, A. Pikovsky, Phase resetting of collective rhythm in ensembles of oscillators, *Phys. Rev. E* **82**, 056202 (2010).
5. Z. Levnajić, Emergent multistability and frustration in phase-repulsive networks of oscillators, *Phys. Rev. E* **84**, 016231 (2011).
6. F. Geier, J. Timmer, C. Fleck, Reconstructing gene-regulatory networks from time series, knock-out data, and prior knowledge, *BMC Sys. Biol.* **1**, 11 (2007). M. Hecker *et al.* Gene regulatory network inference: Data integration in dynamic models - A review, *Biosystems* **96**(1), 86 (2009). F. Emmert-Streib *et al.* Statistical inference and reverse engineering of gene regulatory networks from observational expression data, *Front. Genet.* **3**, 8 (2012).
7. L. Lü, T. Zhou, Link prediction in complex networks: A survey, *Physica A* **390**(6), 1150 (2011).
8. N. Eagle, A. Pentland, D. Lazer, Inferring friendship network structure by using mobile phone data, *Proc. Nat. Acad. Sci. USA* **106**(36), 15274 (2009).
9. Z. Levnajić, A. Pikovsky, Network Reconstruction from Random Phase Resetting, *Phys. Rev. Lett.* **107**, 034101 (2011). M. Timme. Revealing Network Connectivity from Response Dynamics, *Phys. Rev. Lett.* **98**, 224101 (2007).
10. S. G. Shandilya, M. Timme, Inferring network topology from complex dynamics, *New J. Phys.* **13**, 013004 (2011).
11. B. Kralemann, A. Pikovsky, M. Rosenblum, Reconstructing phase dynamics of oscillator networks, *CHAOS* **21**, 025104 (2011).
12. S. Hempel *et al.* Inner Composition Alignment for Inferring Directed Networks from Short Time Series, *Phys. Rev. Lett.* **107**, 054101 (2011).
13. Q. Xia *et al.*, Inference of gene regulatory networks with the strong-inhibition Boolean model, *New J. Phys.* **13**, 083002 (2011).
14. D. Yu, M. Righero, Lj. Kocarev, Estimating Topology of Networks, *Phys. Rev. Lett.* **97**, 188701 (2006).
15. W. Wang, Network Reconstruction Based on Evolutionary-Game Data via Compressive Sensing, *Phys. Rev. X* **1**, 021021 (2011).
16. Y. Roudi, J. Hertz, Mean Field Theory for Nonequilibrium Network Reconstruction, *Phys. Rev. Lett.* **106**, 048702 (2011).
17. J. Ren *et al.*, Noise Bridges Dynamical Correlation and Topology in Coupled Oscillator Networks, *Phys. Rev. Lett.* **104**, 058701 (2010).
18. S. Widder, J. Schicho, P. Schuster, Dynamic patterns of gene regulation 1: Simple two gene systems, *J. Theor. Biol.* **246**, 395 (2007).
19. D. Hansel, H. Sompolinsky, Solvable Model of Spatiotemporal Chaos, *Phys. Rev. Lett.* **71**, 2710 (1993).
20. Z. Levnajić, Evolutionary design of non-frustrated networks of phase-repulsive oscillators, Preprint: arXiv:1210.2786 (2012).
21. J. S. Simonoff, *Smoothing Methods in Statistics* (Springer, New York, 1996).
22. J. P. Hespanha, *Linear Systems Theory* (Princeton University Press, Princeton, 2009).